

DECLARATION OF PERFORMANCE

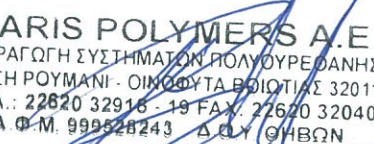
according Annex III of the Regulation (EU) No 305/20111
 amended by Commissions delegated Regulation (EU) No 574/2014 No PU 40

1. Unique identification code of the product-type: **MARIFLEX PU 40**
2. Intended use: **SEALANT FOR FACADE ELEMENTS : EN-15651-1: F-EXT-INT-CC. SEALANT FOR PEDESTRIAN WALKAWAYS: EN-15651-4 F-EXT-INT-CC.**
3. Manufacturer/Distributor: **MARIS POLYMERS S.A.
 Industrial Area of Inofita
 GR-32011 Inofita
 Greece**
4. Authorised representative: Not relevant
5. System of assessment and verification of constancy of performance: **System 3, System 3 for reaction to fire
 Reaction to fire test (Notified Body 370)
 Notified Body (1292)**
6. Harmonised standard: **EN 15651-1/EN 15651-4**
7. Declared performances:

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	E	EN 15651-1/ EN 15651-4
Resistance to flow	≤3 mm	
Loss of Volume	≤10%	
Tensile Properties after immersion in water	No Failure	
Tensile Properties	>0,4	
Tensile properties for non-structural sealants used in cold climates	>0,6	
Tensile Properties at maintained extension	No Failure	
Tensile Properties at maintained extension –Cold climate	No Failure	
Adhesion/Cohesion at variable temperatures	No Failure	
Tensile Properties after immersion in salt water	No Failure	
Tear resistance	No Failure	
Durability	Pass	

The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:


MARIS POLYMERS A.E.
ΠΑΡΑΓΩΓΗ ΣΥΣΤΗΜΑΤΩΝ ΠΟΛΥΟΥΡΕΘΑΝΗΣ
ΘΕΣΗ ΡΟΥΜΑΝΙ - ΟΙΚΟΔΥΤΑ ΒΡΟΙΩΤΙΣ 32011
ΤΗΛ.: 22620 32916 - 19 FAX: 22620 32040
Α.Φ.Μ. 999528243 Δ.Ο.Υ. ΘΗΒΩΝ

Kostas Varelas
R&D Manager
MARIS POLYMERS SA